

FITTING INSTRUCTIONS

LOCKABLE BRACKET TO SUIT HITACHI SWITCH 35-221-130-R-900 LS11039-01 LOCKING BRACKET

Installation

1. Begin by disengaging the handle from the switch. Remove the black cover with the negative and positive indicators (image 1). Now remove the green shaft extension (Image 2), leaving the white square shaft on the switch exposed.
2. Fit the bracket onto the switch, ensuring the square section of the lockout shaft lines up with the shaft on the switch (images 3 & 4).
3. Rotate the bracket handle while engaged with the switch ensuring the 3 turn points align with the lockout tags on the bracket (image 5).
4. If these all align proceed to fit and fasten the bolts between the switch and the locking bracket (image 6).

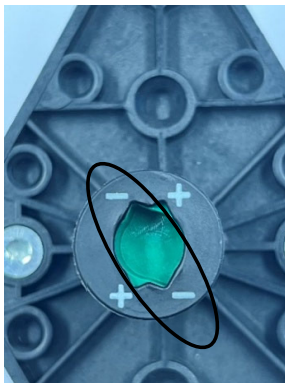


Image 1



Image 2



Image 3



Image 4

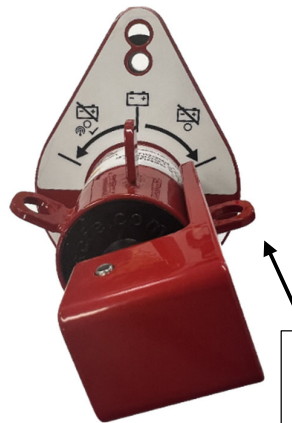


Image 5

HANDLE
ALIGNED
WITH RIGHT
LUG



Image 6